


轴承用波形弹簧

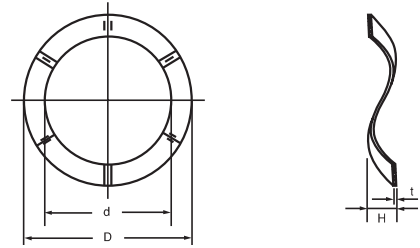

| 规格 | 轴承外径 | d | D | H | t | 适用轴承型号 | | | | |
|---------|------|-------|-------|-----|------|--------|------|------|------|------|
| BWW-624 | 13 | 8.8 | 12.8 | 1.5 | 0.15 | 695 | | 624 | 633 | |
| 625 | 16 | 12 | 15 | 2 | 0.15 | | | 625 | 634 | |
| 626 | 19 | 12.7 | 18.1 | 2.5 | 0.2 | 698 | 607 | 626 | 635 | |
| 608 | 22 | 14.5 | 21 | 2.4 | 0.2 | 6900 | 608 | 627 | 636 | |
| 629 | 26 | 19.5 | 24.8 | 3.2 | 0.2 | | 6000 | 629 | 637 | |
| 6001 | 28 | 20.9 | 26.9 | 3 | 0.25 | 6902 | 6001 | | 638 | |
| 6200 | 30 | 22 | 28.5 | 4.1 | 0.25 | 6903 | | 6200 | 639 | |
| 6201 | 32 | 23.5 | 30.5 | 4 | 0.25 | | 6002 | 6201 | | |
| 6202 | 35 | 26.4 | 33.9 | 3.5 | 0.3 | | 6003 | 6202 | 6300 | |
| 6203 | 40 | 29.8 | 38.3 | 5 | 0.3 | | | 6203 | | |
| 6302 | 42 | 30.1 | 40.6 | 4.5 | 0.3 | 6905 | 6004 | | 6302 | |
| 6303 | 47 | 33.7 | 45.5 | 5 | 0.3 | 6906 | 6005 | 6204 | 6303 | |
| 6304 | 52 | 38.5 | 50 | 7.2 | 0.3 | | | 6205 | 6304 | |
| 6305 | 62 | 47.2 | 60.2 | 6.5 | 0.4 | 6908 | 6007 | 6206 | 6305 | 6403 |
| 6306 | 72 | 55 | 70.5 | 7 | 0.45 | 6910 | | 6207 | 6306 | 6404 |
| 6307 | 80 | 61.3 | 77.8 | 8.5 | 0.45 | 6911 | 6010 | 6208 | 6307 | 6405 |
| 6308 | 90 | 69 | 88.5 | 7 | 0.6 | 6913 | 6011 | 6210 | 6308 | 6406 |
| 6309 | 100 | 79.3 | 98.8 | 6.5 | 0.7 | 6914 | 6013 | 6211 | 6309 | 6407 |
| 6310 | 110 | 88.9 | 108.9 | 8 | 0.8 | 6916 | 6014 | 6212 | 6310 | 6408 |
| 6311 | 120 | 95.8 | 118.9 | 8.5 | 0.8 | 6917 | | 6213 | 6311 | 6409 |
| 6312 | 130 | 108.3 | 128.3 | 11 | 0.8 | 6919 | 6017 | 6215 | 6312 | 6410 |
| 6313 | 140 | 112.4 | 138.4 | 11 | 0.8 | 6920 | 6018 | 6216 | 6313 | 6411 |

波形弹簧

| 规格 | d | | D | | H | | t | |
|------|------|---------------|------|-----------|------|------------|------|--------|
| | 基本尺寸 | 公差 | 基本尺寸 | 公差 | 基本尺寸 | 公差 | 基本尺寸 | 公差 |
| WW-4 | 4.3 | +0.3 -0.15 | 8 | 0 -0.5 | 1.5 | +0.5 0 | 0.2 | ±0.025 |
| 5 | 5.4 | | 9 | | 1.5 | | 0.3 | |
| 6 | 6.4 | | 11 | | 1.5 | | 0.3 | |
| 8 | 8.5 | | 12.5 | | 2 | | 0.3 | |
| 10 | 10.5 | | 14.5 | | 2 | 0.3 | | |
| 12 | 12.5 | | 17 | | 2.5 | +0.7 0 | 0.3 | |
| 14 | 14.5 | | 20 | | 2.5 | | 0.3 | |
| 16 | 16.7 | | 22.5 | | 2.5 | | 0.3 | |
| 18 | 18.7 | | 26 | | 3 | | 0.3 | |
| 20 | 20.7 | | 29.1 | | 3 | 0.3 | | |
| 23 | 23.5 | +0.5 -0.3 | 31 | 0 -0.8 | 3.5 | +1 | 0.3 | ±0.03 |
| 26 | 26.4 | | 34.2 | | 3.5 | -1 -0.5 | 0.3 | |
| 30 | 30.4 | | 39.2 | | 3.5 | | 0.3 | |
| 32 | 33.9 | | 46 | | 4.5 | | 0.3 | |
| 38 | 39 | | 51 | | 5 | | 0.3 | |
| 40 | 40.6 | | 53.5 | | 5 | 0.3 | | |
| 46 | 47.5 | +0.7 -0.5 | 61 | 0 -1.2 | 5.5 | 0.4 | | |
| 50 | 51.4 | | 67.5 | | 5.5 | 0.4 | | |
| 53 | 54 | | 69.8 | | 6 | 0.45 | | |
| 60 | 61.9 | | 79 | | 6.5 | 0.45 | | |

材质：弹簧钢 硬度HRC40-50 表面处理：磷化

注意： 1, d内接圆直径, D为外接圆直径;

2, H为平行2平面之间压缩到3个波峰接触时的高度。