


IWT标准E型挡圈（轴用）

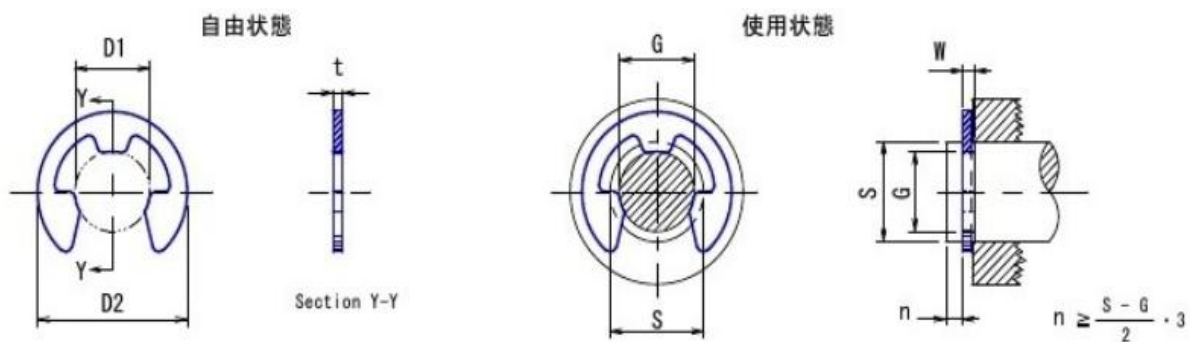

型 号	轴径		基本尺寸					沟槽尺寸				轴向 许用 负荷
			内径		外径	板厚		槽径		槽宽		
	以上	以下	D1	公差	D2	t	公差	G	公差	W	公差	
E-001	0.8	1.0	0.60	+0.02 -0.01	1.3	0.2	±0.02	0.63	+0.03 -0	0.25	+0.05 -0	4.6
E-002	1.0	1.2	0.60		1.5	0.2		0.63		0.25		5.8
E-003	1.0	1.2	0.65		1.8	0.2		0.7		0.25		5.8
E- 07	1.0	1.2	0.65	+0.04 -0.07	2	0.2	±0.03	0.7	+0.05 -0	0.25	+0.05 -0	5.8
E- 10	1.3	1.7	0.95		2.8	0.2		1		0.25		7.5
E- 13	1.6	2.1	1.25		3.3	0.3		1.3		0.35		14
E- 17	2.0	2.6	1.65	+0.05 -0.07	4.2	0.4	±0.04	1.7	+0.05 -0	0.45	+0.07 -0	23
E- 20	2.4	3.0	1.95		4.6	0.5		2		0.55		35
E- 24	2.9	3.8	2.35		6	0.6		2.4		0.68		50
E- 28	3.3	4.2	2.74	+0.05 -0.07	6.5	0.6	±0.04	2.8	+0.05 -0	0.68	+0.07 -0	57
E- 32	3.8	4.7	3.14		7.2	0.6		3.2		0.68		66
E- 37	4.3	5.3	3.64		8	0.7		3.7		0.78		87
E- 40	4.8	6.3	3.93	+0.07 -0.10	10	0.7	±0.04	4	+0.05 -0	0.78	+0.07 -0	97
E- 42	5.0	6.4	4.13		10	0.7		4.2		0.78		100
E- 50	5.8	7.3	4.93		11	0.7		5		0.78		117
E- 58	6.6	8.2	5.73	+0.07 -0.10	12	0.7	±0.04	5.8	+0.05 -0	0.78	+0.07 -0	134
E- 60	6.9	8.6	5.93		12.7	0.9		6		1		225
E- 64	7.3	9.1	6.32		13.5	0.9		6.4		1		238
E- 74	8.4	10.3	7.31	+0.07 -0.10	15	0.9	±0.04	7.4	+0.05 -0	1	+0.07 -0	274
E- 80	9.2	11.3	7.91		16.5	1		8		1		330
E- 85	9.6	12.0	8.40		17	1		8.5		1.1		340
E- 98	11.0	13.3	9.69	+0.08 -0.10	19	1.1	±0.05	9.8	+0.07 -0	1.25	+0.08 -0	430
E-100	11.3	13.8	9.88		19.5	1.1		10		1.25		450
E-110	12.4	15.2	10.88		22	1.2		11		1.35		530
E-120	13.5	16.5	11.87	+0.08 -0.12	24	1.3	±0.05	12	+0.07 -0	1.45	+0.08 -0	630
E-140	14.8	19.3	13.86		28	1.3		14		1.45		690
E-160	18.0	22.0	15.85		32	1.3		16		1.45		840
E-180	20.3	24.8	17.84	+0.08 -0.12	36	1.5	±0.05	18	+0.07 -0	1.65	+0.08 -0	1100
E-210	23.7	29.0	20.83		42	1.5		21		1.65		1280